





source of technology

SCHEDA CATALOGO

ceminetwork.com | cemicomponents.com

BOCCHETTA ASPIRAFANGO

VACUUM OUTLET

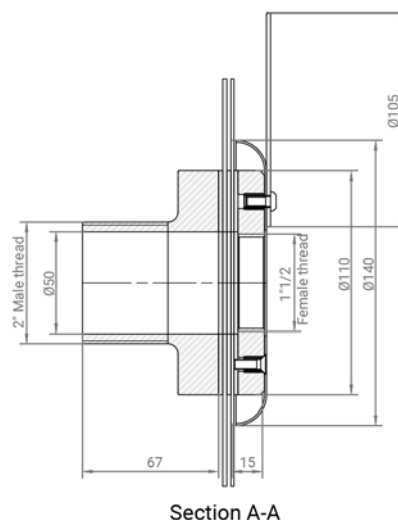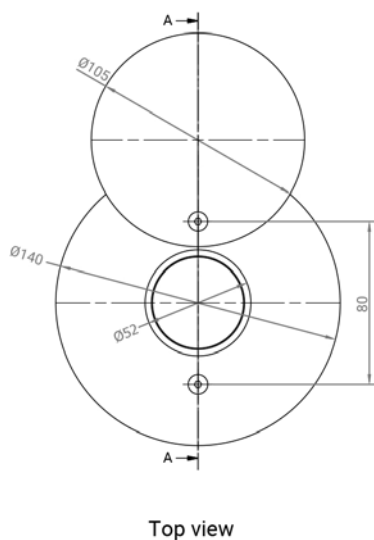

Bocchetta aspirafango per l'installazione a parete per piscine con struttura prefabbricata/cemento armato con rivestimento in telo PVC oppure con sistema di impermeabilizzazione con rivestimento ceramico/mosaico.

Realizzata in PVC ad alta resistenza alla pressione e all'usura, flangia in acciaio INOX AISI 304, copriflangia in acciaio INOX AISI 304 lucidato, viteria in acciaio INOX A2.

E' possibile l'installazione a pavimento nel caso ci sia la presenza di una zona "spiaggetta".

Flangia in acciaio diametro esterno 140 mm.



Vacuum outlet for wall installation for swimming pools with pre-fabricated/reinforced concrete structure with PVC membrane covering or with waterproofing system with ceramic/mosaic covering.

It is made of PVC with high resistance to pressure and wear, complete with AISI 304 stainless steel flange, AISI 304 polished stainless steel flange cover, A2 stainless steel screws.

It's possible the installation on the bottom in case there is the presence of a "beach" zone (surround zone in the pool).

Steel flange external diameter 140 mm.

Cod.	Diametro/ Diameter (mm)	Attacco/Connection (inch)	Portata/ Flow ride(mc/h)
009121	Ø 140	2"	12

Prodotto conforme alla norma / Product compliant with the standards
UNI EN 13451-1:2016 | UNI EN 13451-3:2016 | UNI 16713-2:2016