



source of technology

SCHEDA CATALOGO

ceminetwork.com | cemicomponents.com

BOCCHETTA RIVER





Mod. CA



Mod. PF

RIVER NOZZLE

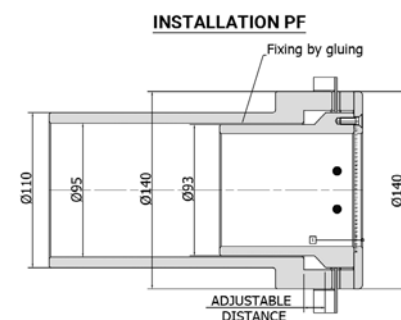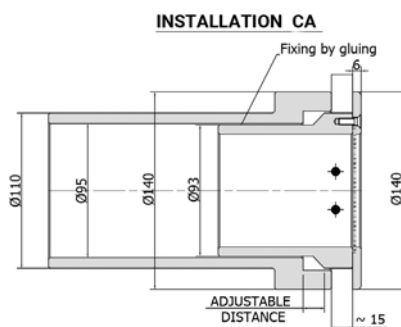

Bocchette realizzate in PVC complete di griglia di protezione, guarnizioni e flangia esterna in PVC con diametro esterno pari a 140 mm, attacco Ø90 mm, viteria a corredo in acciaio INOX A2. Il terminale è inclinato e disponibile in varie angolazioni per favorire lo scorrimento del flusso d'acqua in funzione della curvatura del percorso.

A seconda del tipo di installazione sono disponibili nelle seguenti versioni:

- per piscine in cemento armato con rivestimento ceramico/mosaico (CA)
- per piscine prefabbricate con rivestimento in telo PVC (PF)
- per piscine in cemento armato con rivestimento in telo in PVC o sistema di impermeabilizzazione e rivestimento ceramico/mosaico (PF)



Nozzles made of PVC complete with protection grid, gaskets and external PVC flange with external diameter of 140 mm, Ø90 mm connection and A2 stainless steel screws. The terminal is inclined and available in various angles to facilitate the flow of water according to the curvature of the path.

Depending on the type of installation, they are available in the following versions

- for reinforced concrete pools with ceramic/mosaic coating
- for prefabricated swimming pools with PVC membrane
- for reinforced concrete pools with PVC sheet coating or water-proofing and ceramic/mosaic coating system (PF)

Cod.	Diametro Diameter (mm)	Portata Flow rate (mc/h)	Velocità Speed (m/s)	Angolo Angle(°)	Attacco Connection (mm)
005946_CA	Ø 140	45	2.5	20°	Ø 90
005947_CA	Ø 140	45	2.5	25°	Ø 90
005594_CA	Ø 140	45	2.5	35°	Ø 90
005539_CA	Ø 140	45	2.5	45°	Ø 90
006045_CA	Ø 140	45	2.5	65°	Ø 90
005946_PF	Ø 140	45	2.5	20°	Ø 90
005947_PF	Ø 140	45	2.5	25°	Ø 90
005594_PF	Ø 140	45	2.5	35°	Ø 90
005539_PF	Ø 140	45	2.5	45°	Ø 90
006045_PF	Ø 140	45	2.5	65°	Ø 90