



source of technology



---

# SCHEDA CATALOGO

[ceminetwork.com](http://ceminetwork.com) | [cemicomponents.com](http://cemicomponents.com)

## BOCCHETTA SCOLO CANALA DI SFIORO C/PIATTELLO

## DRAIN NOZZLE FOR OVERFLOW CHANNEL WITH PLATE

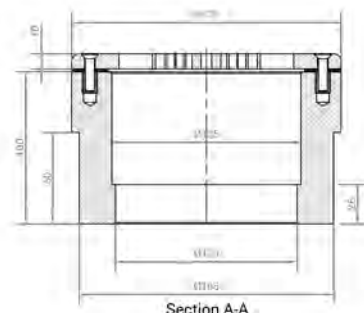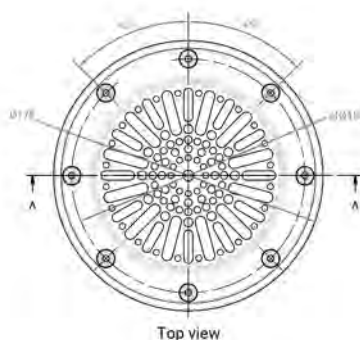

Bocchetta di scolo per l'installazione all'interno della canale per piscine con struttura in cemento armato con rivestimento in telo PVC o con sistema di impermeabilizzazione e rivestimento ceramico/mosaico.

Completa di piattello di copertura in Nylon.

Realizzata in PVC ad alta resistenza alla pressione e all'usura, controflangia in PVC, viteria in acciaio INOX A2.

Flangia in PVC diametro esterno 154 mm.



Drain nozzle for installation inside the channel for swimming pools with reinforced concrete structure with PVC membrane or with waterproofing system with ceramic/mosaic covering.

Complete with Nylon cover small plate.

It is made of PVC with high resistance to pressure and wear, complete with PVC counter flange, A2 stainless steel screws.

PVC flange external diameter 154 mm

| Cod.   | Diametro/ Diameter (mm) | Attacco/Connection (mm) | Portata/ Flow ride (mc/h) |
|--------|-------------------------|-------------------------|---------------------------|
| 021018 | Ø 154                   | 125                     | 8                         |

Prodotto conforme alla norma / Product compliant with the standards  
UNI EN 13451-1:2016 | UNI EN 13451-3:2016 | UNI 16713-2:2016