





source of technology

SCHEDA CATALOGO

ceminetwork.com | cemicomponents.com

BOCCHETTA SCOLO CANALA DI SFIORO

DRAIN NOZZLE FOR OVERFLOW CHANNEL

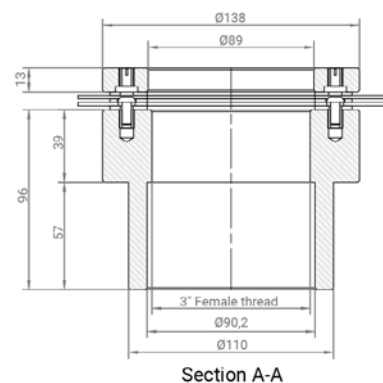

Bocchetta di scolo per l'installazione all'interno della canalina per piscine con struttura prefabbricata/cemento armato con rivestimento in telo PVC o con sistema di impermeabilizzazione e rivestimento ceramico/mosaico.

Realizzata in PVC ad alta resistenza alla pressione e all'usura, controflangia in PVC, viteria in acciaio INOX A2.

Flangia in PVC diametro esterno 138 mm.



Drain nozzle for installation inside the overflow channel for swimming pools with prefabricated/reinforced concrete structure with PVC membrane or with waterproofing system with ceramic/mosaic covering.

It is made of PVC with high resistance to pressure and wear, complete with PVC counter flange, A2 stainless steel screws.

PVC flange external diameter 138 mm.

Cod.	Diametro/ Diameter (mm)	Attacco/Connection (inch)	Portata/ Flow ride(mc/h)
007396	Ø 138	3"	15

Prodotto conforme alla norma / Product compliant with the standards
UNI EN 13451-1:2016 | UNI EN 13451-3:2016 | UNI 16713-2:2016