





source of technology

SCHEDA CATALOGO

ceminetwork.com | cemicomponents.com

FREE LEFT TWIST TOBOGAN

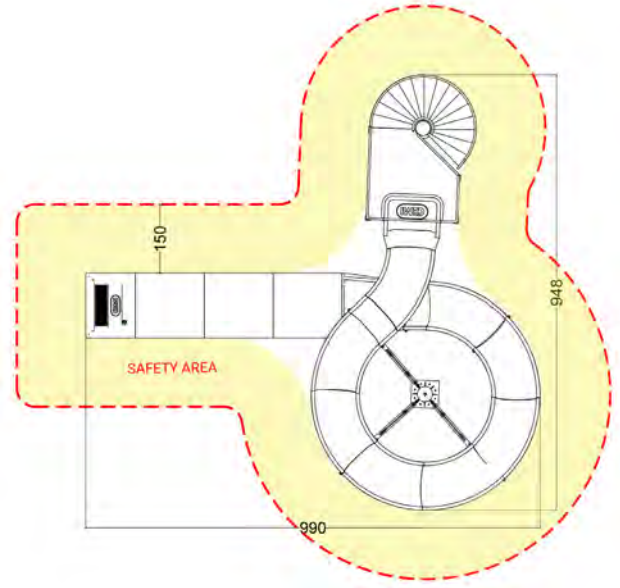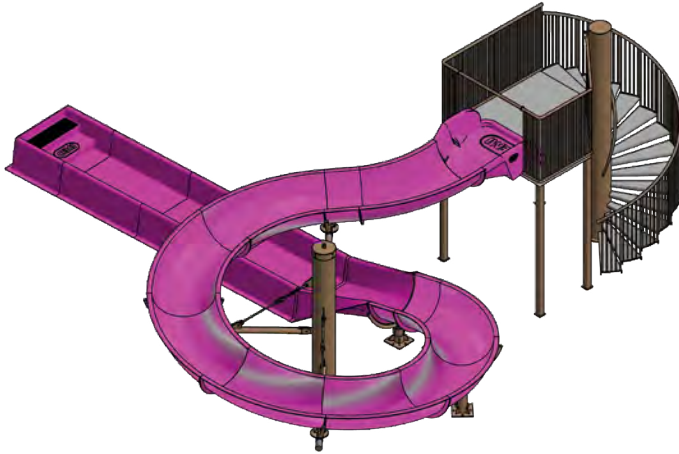

Materiali e tecnologia: Il canale dello scivolo di 900 mm è costruito con tecnologia LRTM e materiali di alta qualità, che richiedono una manutenzione minima.

Finitura in gelcoat: Le superfici interne ed esterne sono trattate con gelcoat per aumentarne la durata, la resistenza agli agenti atmosferici, l'usura e i raggi UV, garantendo anche un aspetto estetico gradevole e un ottimo scivolamento.

Assemblaggio: Gli elementi sono assemblati con bulloneria in acciaio inox AISI 304, assicurando stabilità e sicurezza.

Struttura portante: La struttura è composta da pilastri e bracci in acciaio galvanizzato a caldo, fissati a plinti di cemento armato.

Inclusa torre di risalita realizzata in carpenteria metallica.



Materials and technology: The 900 mm slide channel is built with LRTM technology and high-quality materials that require minimal maintenance.

Gelcoat finish: The internal and external surfaces are treated with gelcoat to enhance durability, resistance to weather, wear, and UV rays, while also ensuring a pleasant aesthetic appearance and optimal sliding performance.

Assembly: The elements are assembled with AISI 304 stainless steel bolts, ensuring stability and safety.

Support structure: The structure consists of galvanized steel columns and anchoring arms, fixed to reinforced concrete foundation blocks.

Includes a climbing tower made of metal carpentry.

Cod.	H.partenza Starting hight (m)	L.scivolo Waterslide length (m)	L.arrivo/frenata Catch unit length (m)	Pendenza Slope	Connessione Connection (mm)	Portata Flow ride (mc/h)	Prezzo Price
021025	2.25	13.50	5.50	13%	Ø140	90	su richiesta/ on request