



source of technology


SCHEDA CATALOGO

ceminetwork.com | cemicomponents.com

PREFILTRI



PREFILTERS

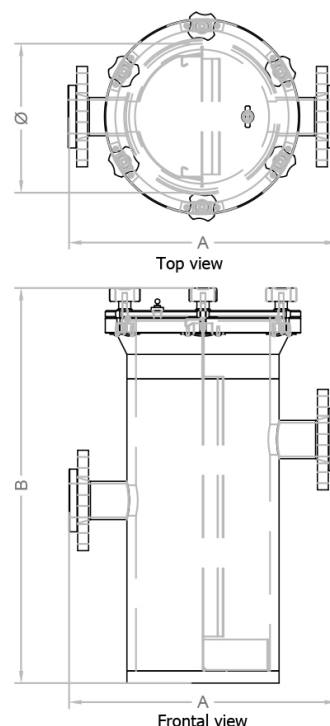

I prefiltri sono realizzati in HDPE (polietilene ad alta densità) e sono completi di cestello interno con griglia in inox AISI 304 e coperchio in plexiglass, valvola di sfiato posizionata sul coperchio superiore e tappo di scarico posizionato sulla parte inferiore del corpo prefiltro.

Testato in pressione fino a 3 bar, al fine di garantire la tenuta delle saldature.

Pressione di esercizio: 0,5 bar



The prefilters are made of HDPE (high-density polyethylene) and are complete with an internal basket with a stainless steel AISI 304 grid and a plexiglass cover, a vent valve positioned on the upper cover, and a drain plug located on the lower part of the prefilter body.

Pressure tested up to 3 bar, in order to guarantee the tightness of the welds.

Operating pressure: 0,5 bar

Cod.	Attacco Connection (inch)	Dim. AxBxC mm	Diametro/Diameter Ø mm	Portata Flow ride (mc/h)
009245	DN 50	440x625	250	12
009246	DN 65	460x695	250	20
009247	DN 80	477x695	250	30
009248	DN 100	502x695	250	48
009250	DN 125	507x695	250	75
009251	DN 150	585x745	315	108
009253	DN 200	689x795	400	192