





source of technology

SCHEDA CATALOGO

ceminetwork.com | cemicomponents.com

VALVOLA AUTOMATICA A 5 VIE BRS 98®

5-WAY AUTOMATIC VALVE BRS 98®

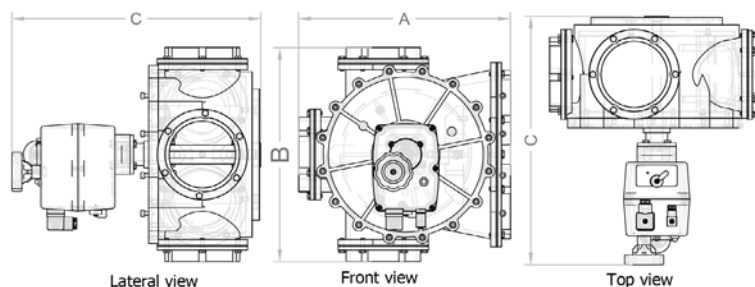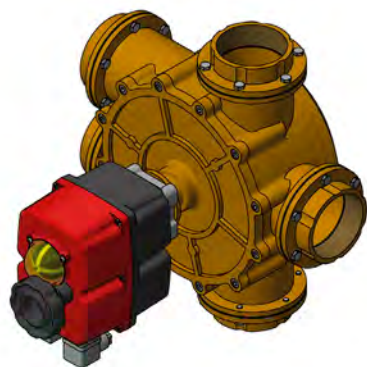

Filtrazione
Filtration



Controlavaggio
Backwashing



Valvola automatica a 5 vie, resistente a pressioni d'esercizio fino a 4 bar, con dispositivo automatico per il risciacquo nelle versioni con attacchi da 2,5" e 4" (lavaggio di qualità). Il corpo della valvola è realizzato in bronzo marino, gli alberi in acciaio INOX AISI 316 e le farfalle in neoprene. L'azionamento è garantito da un attuttore elettrico alimentato a 24 VDC con protezione IP65.

La gestione delle fasi di filtrazione avviene mediante la programmazione della centralina elettronica (PROLOGIC X Cod. 020503).



Automatic 5-way valve, resistant to working pressures up to 4 bar, with automatic rising device in the versions with 2.5" and 4" connections (quality washing). The valve body is made of marine bronze, the shafts of AISI 316 stainless steel and the butterflies of neoprene. Operation is guaranteed by an electric actuator powered at 24 VDC with IP65 protection.

The filtration phases are managed by programming the electronic control unit (PROLOGIC X Cod. 020503).

Cod.	Attacco Connection (inch)	Dim. AxBxC mm	Portata Flow ride (mc/h)
001002	2"	250x250x325	max 18
001003	2" ½	325x325x368	max 30
001004	4	352x356x413	max 70